

240

COMPRESSION LOCK-T HANDLE

IP 65




LH/RH

RoHS



NOB	CC	CH	CL	H GRIP	
				MIN	MAX
1	01	0	33	41	58
2	02	14	33	27	72
3	03	27.5	33	13.5	85

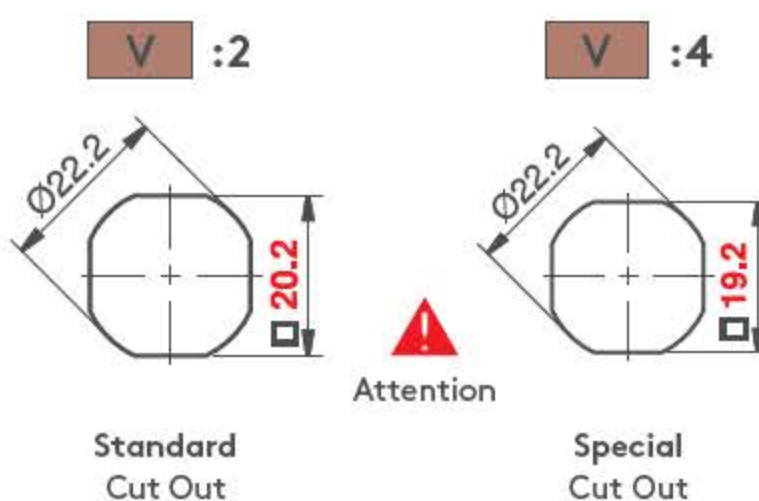

- For the cabinets that require better sealing under vibrating conditions
- Provides 6 mm of compression
- Wide grip range with adjustable screw
- Provides noise isolation
- Three cam alternatives available

APPLICATIONS

Railway applications, construction equipment, electric panels, machinery covers


MATERIAL

HOUSING: Zamak DIN-EN 1774-ZnAl4Cu1
 HANDLE: Zamak DIN-EN 1774-ZnAl4Cu1
 CAM: Steel
 GASKET: Rubber

FINISH

Chrome or black coated

PRODUCT CODE

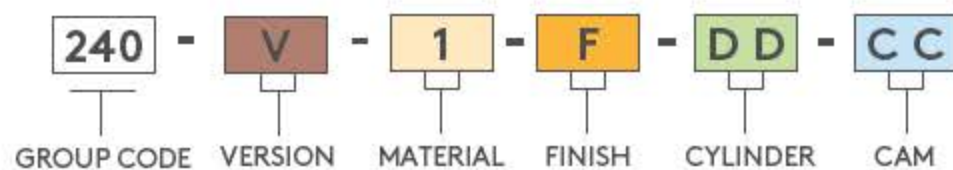

MATERIAL	M	FINISH	F
Zamak	1	Chrome	1
		Black coated	2

CYLINDER	SPECIFICATIONS	DD
	No cylinder	00
	Stainless steel dust cap (Keyed alike)	03
	Stainless steel dust cap (Keyed differ)	32
	CH751 (Stainless steel dust cap)	07

060 A3

FIXING DEVICE



- Can be ordered separately

